

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-06/0259
of 8 December 2016

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Trade name of the construction product

Product family
to which the construction product belongs

Manufacturer

Manufacturing plant

This European Technical Assessment
contains

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

Deutsches Institut für Bautechnik

TOGE ceiling anchor TDN 6

Deformation- controlled expansion anchor made of
galvanised steel for multiple use for non-structural
applications in concrete

TOGE Dübel GmbH & Co. KG
Illesheimer Straße 10
90431 Nürnberg
DEUTSCHLAND

TOGE Dübel GmbH & Co. KG

10 pages including 3 annexes which form an integral part
of this assessment

Guideline for European technical approval of "Metal
anchors for use in concrete", ETAG 001 Part 6: "Anchors
for multiple use for non-structural applications",
August 2010,
used as European Assessment Document (EAD)
according to Article 66 Paragraph 3 of Regulation (EU)
No 305/2011.

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The TOGE ceiling anchor TDN 6 is an anchor made of galvanized steel which is placed into a drilled hole and anchored by deformation-controlled expansion.

Product and product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

The essential characteristics regarding mechanical resistance and stability are included under the Basic Works Requirement Safety in use.

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	See Annex C 2

3.3 Safety in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance in concrete	See Annex C 1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with guideline for European technical approval ETAG 001, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.


Issued in Berlin on 8 Dezember 2016 by Deutsches Institut für Bautechnik

Andreas Kummerow
p. p. Head of Department

beglaubigt:
Tempel

product and installation condition

installed anchor

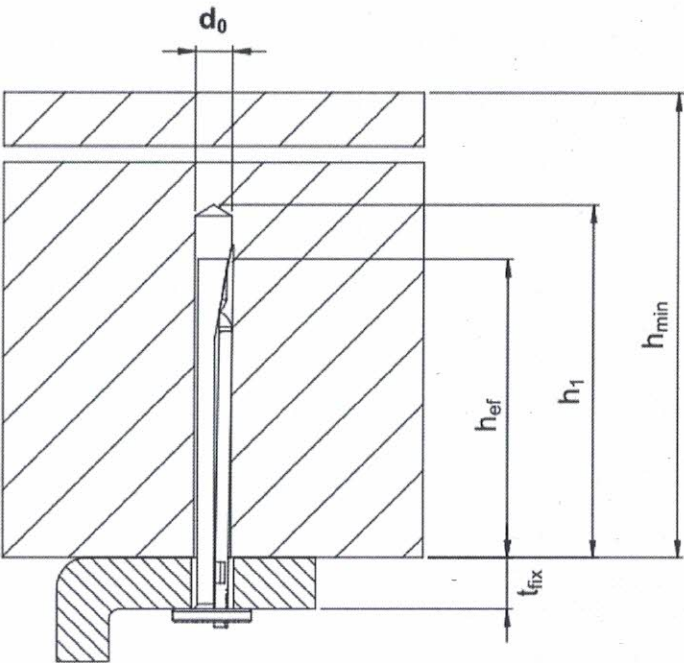

h_{ef}	=	effective anchorage depth
h_1	=	depth of the drill hole
h_{min}	=	thickness of member
t_{fix}	=	Thickness of fixture
d_0	=	nominal drill bit diameter

TOGE ceiling anchor TDN 6

Product description

Product and installation conditions

Annex A 1

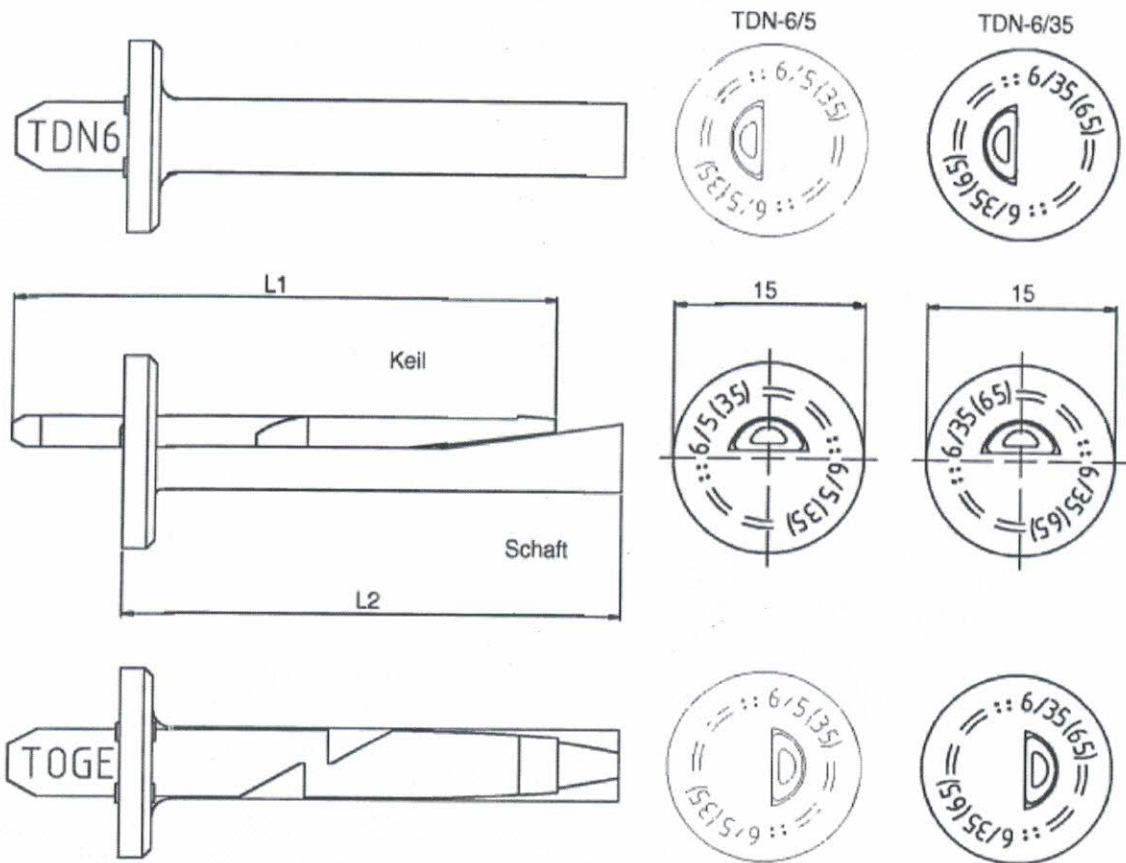


Table A 1: Materials

Material
Steel according to EN 10263-2, galvanized according to EN ISO 4042

Table A 2: Dimensions

Anchor size		TDN	
		6/5	6/35
Length of the wedge	[mm]	43	73
Length of the shaft	[mm]	39	69,5

TOGE ceiling anchor TDN 6

Product description

Material and variants

Annex A 2

Intended use

Anchorage subject to:

- static and quasi-static loads
- used only for multiple use for non structural application acc. to ETAG 001, Part 6
- used for anchorages with requirements related to resistance of fire

Base materials:

- reinforced and unreinforced concrete according to EN 206-1:2000
- strength classes C20/25 to C50/60 according to EN 206-1:2000
- cracked and uncracked concrete

Use conditions (Environmental conditions):

- anchorage subject to dry internal conditions

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed for design method C in accordance with:
 - ETAG 001, Annex C, Edition August 2010 or
 - CEN/TS 1992-4:2009.
- Anchorages under fire exposure are designed in accordance with
 - EOTA Technical Report TR 020, Edition May 2004 or
 - CEN/TS 1992-4:2009, Annex D (it must be ensured that local spalling of the concrete cover does not occur).

Installation:

- Hammer drilling only.
- Anchor installation carried out by appropriately qualified personal and under the supervision of the person responsible for technical matters of the site.
- Positioning of the drill holes without damaging the reinforcement.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.

TOGE ceiling anchor TDN 6


Annex B 1

Intended use


Specifications

Table B 1: Installation parameters

Anchorsize			TDN 6	
			6/5	6/35
nominal drill bit diameter	d_0	[mm]	6,0	
cutting diameter of drill bit	$d_{cut} \leq$	[mm]	6,4	
depth of drill hole	$h_1 \geq$	[mm]	40	
effective anchorage depth	$h_{ef} \geq$	[mm]	32	
Minimum thickness of member	h_{min}	[mm]	80	
Minimum edge distance	c_{min}	[mm]	150	
Minimum spacing	s_{min}	[mm]	200	
Maximum thickness of fixture	t_{fix}	[mm]	5	35

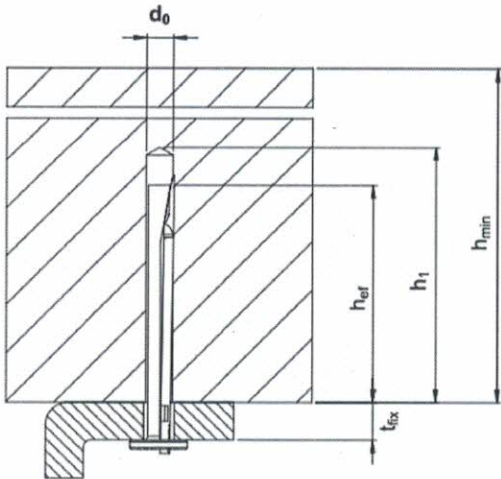

Installation Instructions

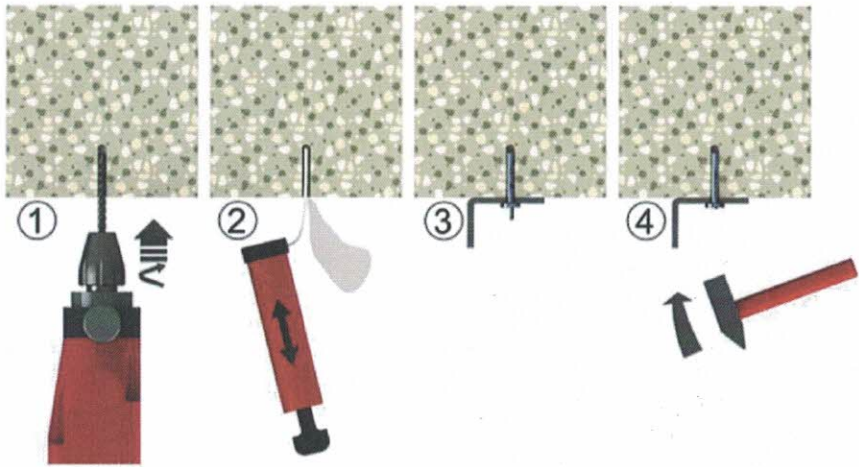

TOGE ceiling anchor TDN 6

Annex B 2

Intended use

Installation parameters

Table C 1: Characteristic values for design method C according to ETAG 001, Annex C or for design method C according CEN/TS 1992-4

Anchorsize			TDN 6
For all load directions and for all failures			
Characteristic resistance in cracked and uncracked concrete C20/25 to C50/60	F_{Rk}	[kN]	5,0
Edge distance	$c_{cr,N} = c_{min}$	[mm]	150
Spacing	$s_{cr,N} = s_{min}$	[mm]	200
Partial safety factor	γ_M ¹⁾	[-]	1,5
Shear load with lever arm			
Characteristic bending moment	$M^0_{Rk,s}$	[Nm]	5,4
Partial safety factor	γ_{Ms}	[-]	1,25

¹⁾ The installation safety factor γ_2 resp. $\gamma_{inst} = 1,0$ is included

TOGE ceiling anchor TDN 6

Performances

Characteristic values for design method C according to ETAG 001 or CEN/TS 1992-4

Annex C 1

Table C2: Characteristic resistance under fire exposure

Anchorsize			TDN 6	
Fire resistance class				
R30	Characteristic resistance	$F_{Rk,fi30}$	[kN]	0,8
R60		$F_{Rk,fi60}$	[kN]	0,7
R90		$F_{Rk,fi90}$	[kN]	0,6
R120		$F_{Rk,fi120}$	[kN]	0,4
R30	Characteristic resistance	$M^0_{Rk,s,fi30}$	[Nm]	0,67
R60		$M^0_{Rk,s,fi60}$	[Nm]	0,55
R90		$M^0_{Rk,s,fi90}$	[Nm]	0,43
R120		$M^0_{Rk,s,fi120}$	[Nm]	0,31
Edge distance				
R30 to R120		$C_{cr, fi}$	[mm]	150
Spacing				
R30 to R120		$S_{cr, fi}$	[mm]	200

TOGE ceiling anchor TDN 6

Performances

Characteristic values for design under fire exposure

Annex C 2